


The new Bad Ax disc mulcher is a highly economical, yet productive skid-steer forestry mulcher built to take on the toughest applications, making quick work of trees, brush and other vegetation. Featuring a direct drive, the Bad Ax puts 100 percent of its power to the cutting disc, and doesn't include any pulleys or belts to maintain. It is ideal for right-of-way vegetation management, land clearing, vegetation control, forest fire prevention and more.







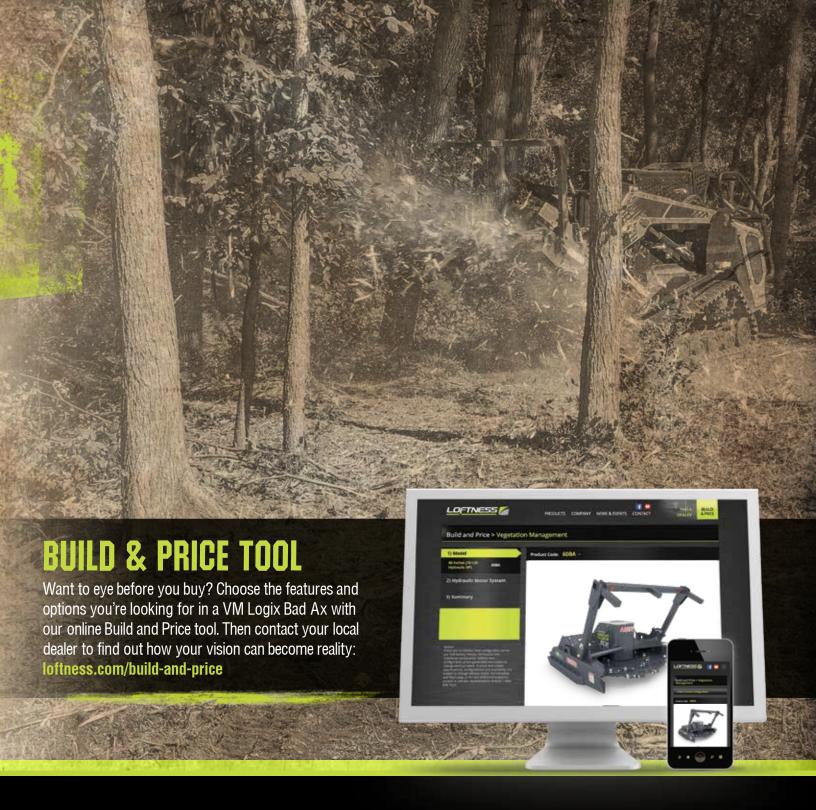





BOLT-ON TEETH

Quadco teeth are attached to the mulching disc using bolt-on mounts. These make the teeth easy to rotate, replace and remove while on the jobsite. The teeth have four cutting surfaces, allowing them to be rotated four times before sharpening is needed.



60-INCH DIAMETER, FULLY MACHINED DISC

The Bad Ax can cut down trees up to 14 inches in diameter using a 60-inch diameter disc. The fully machined disc is 1.25 inches thick using premium-strength steel, and it contains no welds, so there are no points subject to stress cracking. Additionally, the bolt-on mounts can be replaced in the field without the need for cutting, welding or rebalancing the rotor.

The large Bad Ax disc builds up its own inertia during use, pushing its productive force beyond the maximum hydraulic horsepower. This helps it more quickly gather and process vegetation.

AGGRESSIVE MULCHING PERFORMANCE



// Recutter Bar

The Bad Ax uses a recutter bar along with stationary counter teeth to hold material in place while it is being mulched. This unique design allows the Bad Ax to cut material into finer particles for faster decomposition and produce a nicer looking end product. It also helps avoid log jams in the chamber, which can be extremely difficult to remove in competitive units.



// Direct Drive

The hydraulic motor is directly mounted to the disc, providing 100 percent of its power to the job at hand, and eliminating the need for high-maintenance pulleys or belts.




// Adjustable Tree-Pusher Bar

Featuring welded claw hooks, the bar is used to push falling trees away from the power unit and to position material for proper feeding into the mulching disc. Unlike many other disc mulchers, the pusher bar on the Bad Ax can be adjusted to meet the needs of the jobsite.



UNLIKE ANY OTHER

The Bad Ax isn't just another disc mulcher. It's equipped with tons of new features to perform better, cut material into finer particles and require less maintenance than other products on the market. Not to mention, it's backed by Loftness' superior customer support to ensure your success on the job.

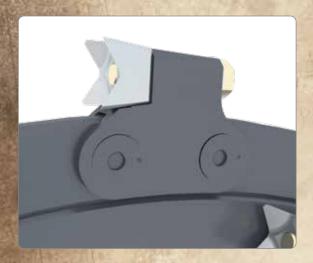

// Quadco Blades

Reversible with ultra-sharp, heat-treated steel knife edges, the Quadco blades effortlessly slice through trees and vegetation, as opposed to shredding and tearing. They can be rotated on site for a fresh cutting edge, or sharpened to maintain efficiency.



// Deflector

The discharge deflector directs material down and away from the machine, helping to protect the equipment and operator. Unlike competitive hinged designs, the Bad Ax uses a rigid deflector for better control of the discharge.

// FEATURES



Instrumentation: A rubber-mounted pressure gauge allows the operator to easily monitor the workload from the skid steer cab.



Housing Design: The sides of the Bad Ax housing are parallel. This design provides optimal control when compared with funnel, or V-shaped, disc mulchers, which can be easily misdirected when hooking onto stumps or other solid objects.



Anti-Cavitation Shutdown Circuit:
An integrated anti-cavitation shutdown circuit protects motor during shutdown.



Ground-Level Mulching:

The front of the Bad Ax housing is angled, allowing the teeth to mulch at ground level.



Well-Balanced Design:

The redesigned Bad Ax is lighter than the original without sacrificing durability. Plus, the disc has been moved four inches closer to the power unit for improved center of gravity and superior machine balance.



Anti-Wrap Bearing Protection:

A precise labyrinth ring design helps keep debris from entering the bearing chamber.

BAD AX SPECIFICATIONS

MODEL:

60BA

CUTTING WIDTH:

60" (1.52 m)

OVERALL WIDTH:

67" (1.70 m)

NUMBER OF TEETH:

44

WEIGHT:

2,643 LBS (1,199 kg)

CRATED WEIGHT:

2,793 LBS (1,267 kg)

AUXILIARY HYDRAULIC FLOW:

36-50 GPM

MAX HYDRAULIC PRESSURE PISTON MOTOR - 5,000 PSI

HYDRAULIC HORSEPOWER RANGE:

70-120

DISC SPEED:

Up to 1,150 RPM 200+ MPH (321.9 KPH) TIP SPEED



SEE THE FULL LIST OF FEATURES AND SPECS AT LOFTNESS.COM

or call 800-828-7624





VEGETATION MANAGEMENT EQUIPMENT FROM LOFTNESS

































PTO Battle Ax (Coming Soon)





// GRAIN BAGGING

// CROP SHREDDERS

// VEGETATION MANAGEMENT

// FERTILIZER EQUIPMENT



Call us or visit loftness.com for more information on the new Bad Ax.

LOFTNESS 🥖

Loftness Specialized Equipment P.O. Box 337 Hector, Minnesota 55342 USA

Toll Free US & Canada: 800-828-7624 International 320-848-6266 email: info@loftness.com www.loftness.com