





Battle Ax Tractor

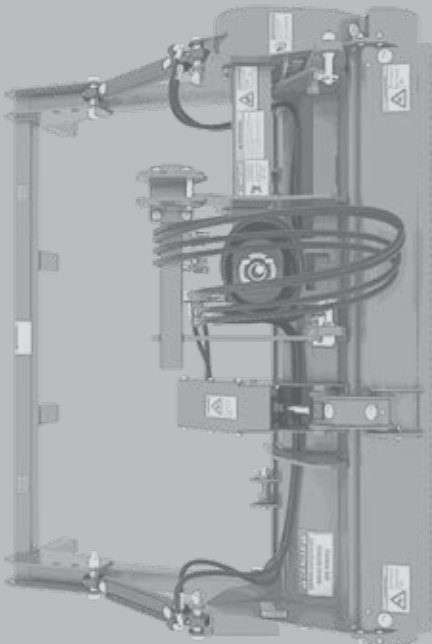

**MADE
TO MULCH**

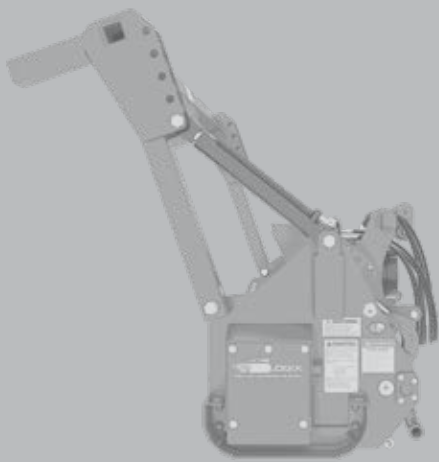



BATTLE AX TRACTOR

For Tractors With 540 RPM PTO
and 30-70 PTO Horsepower

BT20

Cutting Width	61" (1.6 m)
Overall Width	77" (1.8 m)
Number of Teeth	38
Weight (Includes Hydraulic Pusher)	1,675 lbs (760 kg)
Deflector Door Weight (Optional)	86 lbs (39 kg)
Containment Door Weight (Optional)	207 lbs (94 kg)
PTO Horsepower Range	30-70

SPECIFICATIONS




// Depth Gauges

The Battle Ax rotor includes built-in depth gauges, which function similarly to raker teeth on chain saws to prevent the attachment from engaging too much material at one time. This unique design is more ideal for managing the amount of material being fed into the attachment than competitive ring-style rotors, which many operators find to be overly limiting, especially when using carbide teeth.



// Two-Stage Cutting Chamber

The Loftness-exclusive two-stage cutting chamber is capable of processing material more thoroughly than competitive units by cutting it twice. Material is initially cut by the primary shear bar, located on the rear bumper. Then, a secondary shear bar behind the front bumper drives material back down into the knives for further processing before it is discharged to the ground.

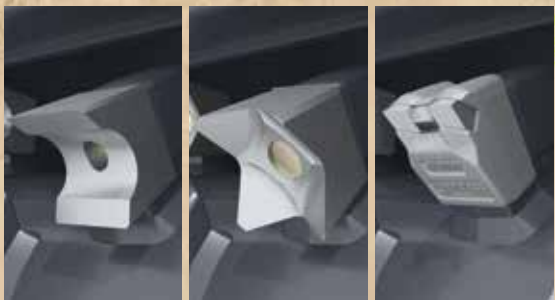

// 3-Point Hitch

The Battle Ax Tractor hitch is adaptable from Cat I to Cat II, free-link or quick hitch. The mulcher can be centered or positioned 16 inches offset to the right.

// Three Teeth Options

Choose from Quadco planer blades, 4-point beaver teeth or double carbide teeth. The cutting teeth are mounted to the rotor with a single bolt. They can be easily reversed or replaced on the jobsite using a common hex socket.

// PTO Kickout

A cam-type PTO kickout protects the gearbox from damage without a clutch pack.

// Optional Tree Pusher Bar

A manually adjustable tree pusher bar with welded claw hooks is available.

// Optional Containment Door

A containment door option helps prevent the mulcher from projecting material underneath the tractor.

// Optional Deflector Door

The Battle Ax Tractor can be equipped with a deflector door for more thorough processing and direct discharge toward the ground.

SEE THE FULL LIST OF FEATURES AND SPECS AT **LOFTNESS.COM**
or call 800-828-7624.



BUILD & PRICE TOOL

Customize your Kwik Cut with our online Build and Price tool. loftness.com/vm-build-and-price



cool flow
Auxiliary Hydraulic Cooler



// GRAIN BAGGING

// CROP SHREDDERS

// VEGETATION MANAGEMENT

// FERTILIZER EQUIPMENT



Call us or visit loftness.com for more information on the Battle Ax Tractor.

LOFTNESS 
AN EMPLOYEE OWNED COMPANY

Loftness Specialized Equipment
P.O. Box 337
Hector, Minnesota 55342 USA

Toll Free US & Canada: 800-828-7624

International 320-848-6266

email: info@loftness.com

www.loftness.com