




Ditcher



FIX YOUR DRAINAGE PROBLEMS

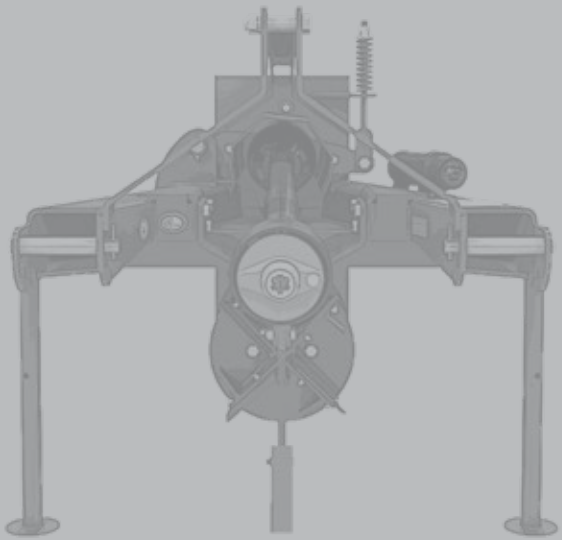



Ditcher

For Tractors With 540 or
1,000 RPM PTO and 50-250 Horsepower

SPECIFICATIONS

Length	62.5" (158.8 cm)	Impeller Diameter	18" or 20" (45.7 cm or 50.8 cm)
Height	47.75" (121.3 cm)	Mount	3-point Cat II or III quick hitch
Width	51.5" (130.8 cm)	Drive	PTO driven, belt drive
Weight	985 lbs (447 kg)	Blades	Reversible, hardened
Soil Spread	30' (9.1 m)	Skid Shoes	Ratchet adjust
Maximum Depth	12" (30.5 cm)	HP Range	50-250 HP

// The Best Way to Dig a Ditch

Improve drainage in ditches, fields and many other applications with the Loftness Ditcher. Heavy-duty construction, easy operation and adjustable performance make Loftness a superior choice for water control.



// DITCHER FEATURES



Adjustable Skid Shoes:

The skid shoes allow the cutting depth to be adjusted up to 12 inches deep. A ratchet link provides easy and precise adjustment.



Adjustable Impeller Blades:

The impeller blades are adjustable, allowing you to dig 18- or 20-inch-wide ditches. The blades are also reversible to double the service life before replacement is needed.



30-Foot Spread Distance:

The powerful impellers are capable of spreading soil up to 30-foot (9.1 m) distances.



Point Shank:

A point shank breaks up soil ahead of the impeller. It is designed for running in hard or rocky conditions.



Belt Drive:


A 5-band belt drive with taper-lock sheaves provides reliable, efficient transfer of power from the tractor to the impeller. The belt has a spring tensioner with an easy nut adjustment.



Jack Stands:

The included jack stands allow the Ditcher to be easily hooked up and disconnected.

SEE THE FULL LIST OF FEATURES AND SPECS AT **LOFTNESS.COM**
or call 800-828-7624.



EQUIPMENT FROM LOFTNESS



GRAIN BAGGING



CROP SHREDDERS



VEGETATION MANAGEMENT



FERTILIZER EQUIPMENT

// GRAIN BAGGING

// CROP SHREDDERS

// VEGETATION MANAGEMENT

// FERTILIZER EQUIPMENT

Call us or ask your local Loftness dealer about the Loftness Ditcher.