

» STONE CRUSHER

**LOFTNESS** 

# STONE AX™



***Proudly American.***



Explore all Features



### **CONTROLLED CRUSH**

The Stone Ax™ has an adjustable front anvil to help control the final particle size. It also features a rear hydraulic door, allowing operators to further control how thoroughly stones are processed on the fly. The rear door is equipped with specialized fins that allow soil to pass through, so more power is focused on crushing stones.



### **ROCK-HARD DEPENDABILITY**

Large rotor bearings. One-inch-thick steel drum walls. A Hardox® lined body. Everything about the Stone Ax is designed for durability. We've also tested it in some of the hardest material that exists, so you can count on it getting you through the most demanding jobs – day in and day out.



### **DESIGNED TO DOMINATE SPECIALIZED ROTOR DESIGN**

The tooth pattern is engineered to complete jobs faster, while providing optimum rotor balance. It's a true one-pass machine for many applications.

### **6" STONE CAPACITY**

## **BUILT SOLID TO BUST STONE**

Whether you're cleaning up farmland, preparing a construction site or improving a back road, nothing gets the job done like Loftness. Our stone crusher attachment is designed to work harder, last longer and perform better than anything else. Because if it didn't...our name wouldn't be on it.



## 275CC RADIAL PISTON MOTOR

When crushing stones, you don't want to come up short on power. That's why we gave the Stone Ax a large 275cc radial piston motor that leads the industry with exceptional torque and works through the toughest material without slowing down. It requires a skid steer with 34 to 50 GPM up to 5,000 PSI.



## REALLY TOUGH TEETH

The carbide teeth on the Stone Ax are designed to withstand harsh working conditions. If any of them need to be replaced, it can be done easily on the jobsite.



## SPECIFICATIONS

Model	63SAHv
Overall Length	81" (2.1 m)
Overall Width	66" (1.7 m)
Working Width	63" (1.6 m)
Max Working Depth	4" (10.2 cm)
Max Stone Size	6" (15.2 cm)
Rotor Diameter	20" (0.5 m)
Number of Teeth	46
Drum Wall Thickness	1" (2.5 cm)
Rotor Bearing Diameter	2.5" (6.4 cm)
Hydraulic Flow Range	34-50 GPM up to 5,000 PSI



» The Stone Ax has a 6-inch stone capacity and a 4-inch working depth.



» An integrated pressure gauge helps operators keep the attachment working at the optimum hydraulic load for peak performance.


» Bearings are protected from the stone crushing operation to help maximize service life.

» A 63-inch working width is the ideal size for covering the skid steer's tracks.

# DURABILITY RUNS DEEP WITH OUR FULL LINE OF EQUIPMENT



**MULCHING HEADS » BRUSH CUTTERS » DISC MULCHERS » FLAIL MOWERS  
STUMP GRINDERS » HYDRAULIC COOLERS » MECHANICAL TRIMMERS**

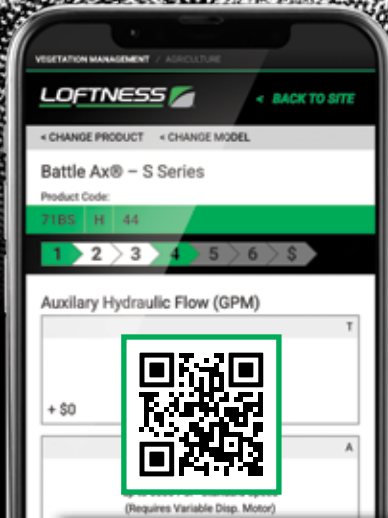

## **BUILD & PRICE TOOL**

Like what you see? Start customizing your own Stone Ax™ with our online tool.



## **FIND A DEALER**



Prefer to talk to a local expert? Find your nearest Loftness dealer and get straight answers.

## **Proudly American. Employee Owned.**

At Loftness, we're proud of the products we make at our local manufacturing facility in Hector, Minnesota. And we take things personally when it comes to providing customers with the most durable, highest performing equipment that's backed by the best customer support. That's because we're 100% employee-owned, so every single one of us has a stake in your success.



Loftness Specialized Equipment  
650 Main Street South • Hector, Minnesota 55342 USA  
US & Canada: 800-828-7624 | International 320-848-6266  
info@loftness.com | www.loftness.com