


# LOFTNESS 2019 Retail Prices

## Snow Blowers for Standard-flow Skid Steers

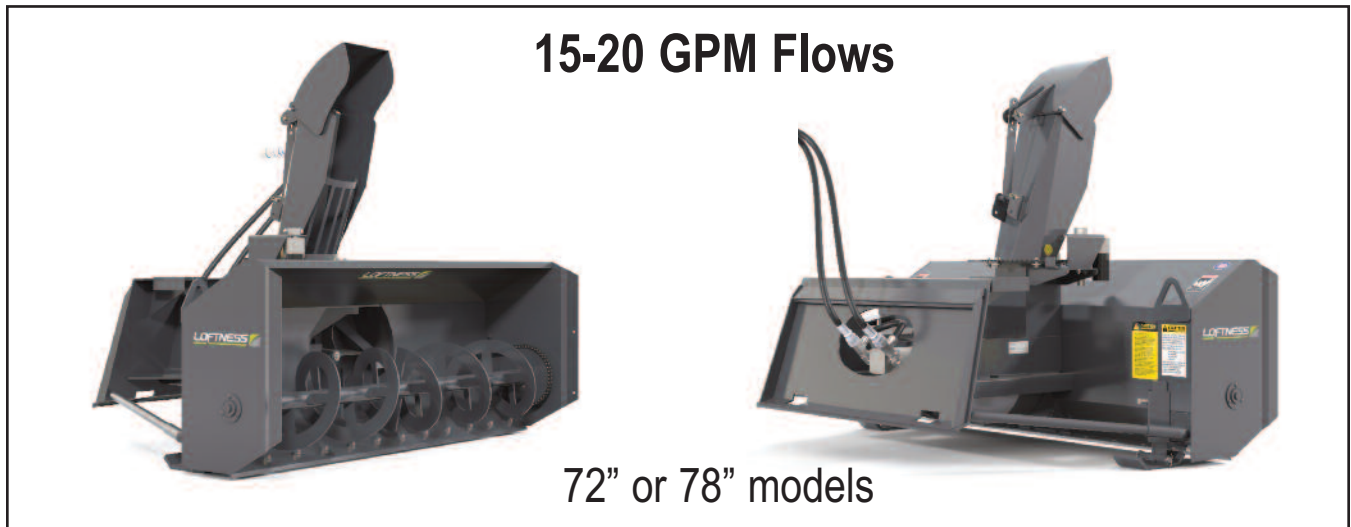

### Features

- Flow Ranges from 15-20 GPM
- Dual Hydraulic Drive
- Two-stage Design
- 20 inch Diameter 5 Blade Fan
- 13 inch Diameter Open-spoke Auger
- 28 inch Cutting Height
- 9.5 inch Diameter Spout
- 1 inch Bearings on Auger & Drive
- # 50 Roller Chain
- Universal Skid Steer Mount
- Bolt-on Hardened Steel Cutting Edge
- Adjustable Skid Shoes
- Electric over Hydraulic Spout Controls
- Hydraulic Spout Rotation and Deflector
- Gear-driven Spout 270 Degrees
- Pin Wiring Harness or Switch
- Hoses Included (couplers are not)
- Charcoal Grey Paint

### Specs & Pricing

Model Number	Width (inches)	Weight (pounds)	Hydraulic Requirement	Maximum Pressure	List Price (USD)
721ESHH	72	615	15-16 GPM	4500 PSI	\$ 8,349.00
721EMHH	72	615	17-20 GPM	4500 PSI	\$ 8,349.00
781EMHH	78	645	17-20 GPM	4500 PSI	\$ 8,359.00


Crating (net prices)    721 = \$135.00    781 = \$155.00

L10045 - Printed 3.1.19 - Prices Effective 3.1.19 - Subject to Change - USD - FOB Factory - Uncrated

**800.828.7624 - loftness.com - 320.848.6266**

# LOFTNESS 2019 Retail Prices

## Snow Blowers for High-flow Skid Steers

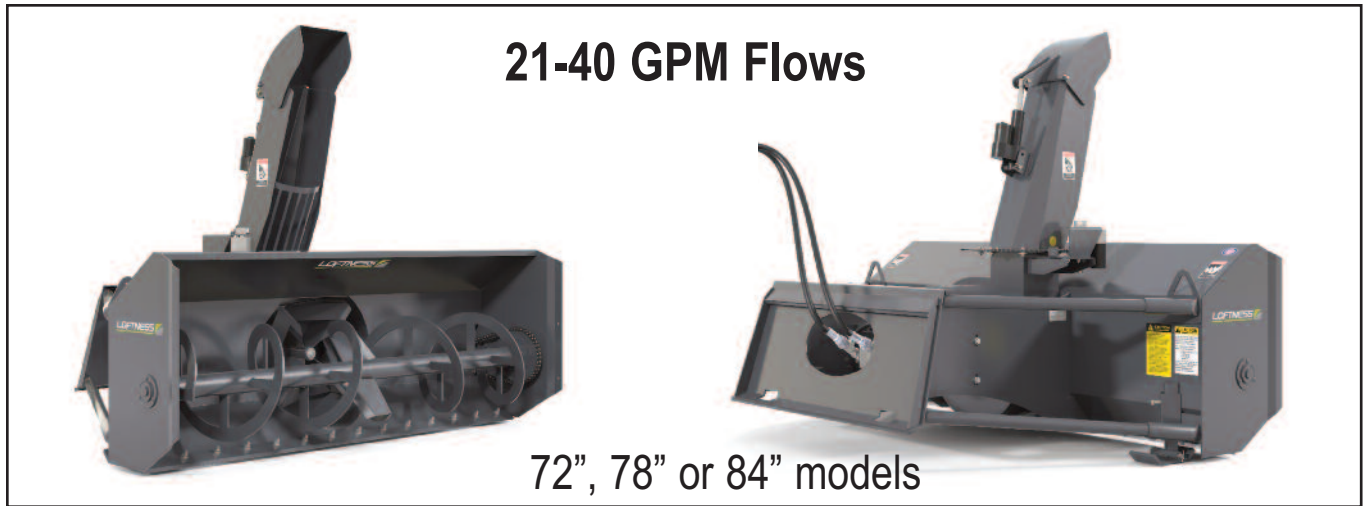

### Features

- Flow Ranges from 21-40 GPM
- Dual Hydraulic Drive
- Two-stage Design
- 24 inch Diameter 5 Blade Fan
- 16 inch Diameter Open-spoke Auger
- 32 inch Cutting Height
- 11 inch Diameter Spout
- 1-3/8 inch Bearings on Auger & Drive
- # 60 Roller Chain
- Universal Skid Steer Mount
- Bolt-on Hardened Steel Cutting Edge
- Adjustable Skid Shoes
- Electric over Hydraulic Spout Controls
- Pin Wiring Harness or Switch
- Hydraulic Spout Rotation and Deflector
- Gear-driven Spout 270 Degrees
- Hoses Included (couplers are not)
- Charcoal Grey Paint

### Specs & Pricing

Model Number	Width (inches)	Weight (pounds)	Hydraulic Requirement	Maximum Pressure	List Price (USD)
721D1HH	72	1003	21-25 GPM	4500 PSI	\$ 8,519.00
781D1HH	78	1020	21-25 GPM	4500 PSI	\$ 8,639.00
721D2HH	72	1005	26-32 GPM	3750 PSI	\$ 8,519.00
781D2HH	78	1020	26-32 GPM	3750 PSI	\$ 8,639.00
841D2HH	84	1050	30-32 GPM	3750 PSI	\$ 8,729.00
781D3HH	78	1060	33-40 GPM	4500 PSI	\$ 8,689.00
841D3HH	84	1090	33-40 GPM	4500 PSI	\$ 8,819.00

Crating (net prices)

721 = \$135.00 - 781 = \$155.00 - 841 = \$175.00

L10045 - Printed 3.1.19 - Prices Effective 3.1.19 - Subject to Change - USD - FOB Factory - Uncrated

**800.828.7624 - loftness.com - 320.848.6266**

# LOFTNESS 2019 Retail Prices

## Rear-mounted Snow Blowers for Tractors



Standard-duty from  
40 to 120 HP

841S - 84 inch

### Features

- Power Requirements from 35-120 HP
- 540 RPM PTO Shaft
- 120 HP Oilbath Gearbox
- Two-stage Design
- 27 inch Diameter, 3 Blade Fan
- 16 inch Diameter Open-spoke Auger
- 32 inch Cutting Height
- 11 inch Diameter Spout
- 1- 3/8 inch Bearings on Auger & Drive
- # 60 Roller Chain
- Shear-bolt Protection
- Rear-mounted for Tractors
- Category I or II Welded Hitch
- Hitch is Designed for Free-link Only
- Bolt-on, Hardened Steel, Cutting Edge
- Adjustable Skid Shoes
- Large Diameter Auger Tube
- Hydraulic Spout Rotation
- Gear-driven Spout 270 Degrees
- Adjustable Deflector (Hydraulic option)
- Hitch Stand
- Charcoal Grey Paint

### Specs & Pricing

Model	Width of Cut	Weight	HP Req.	List Price
841S	84 inch	877 pounds	40-120	\$ 7,759.00
Hydraulic Deflector (hoses and couplers are included)			8305-30	\$ 350.00

Crating (net prices) = \$175.00

L10045 - Printed 3.1.19 - Prices Effective 3.1.19 - Subject to Change - USD - FOB Factory - Uncrated

**800.828.7624 - loftness.com - 320.848.6266**

# LOFTNESS 2019 Retail Prices

## Rear-mounted Snow Blowers for Tractors 60-120 HP



### Features

- Bolt-on Cutting Edge
- 540 RPM PTO Shaft
- 120 HP Oilbath DIRECT DRIVE Gearbox
- Heavy-duty Open-spoke Auger
- 30 in. Dia. Fan Housing, 11 in. Deep
- # 60 HD Roller Chain
- 1- 1/2 inch Bearings on Auger
- 1- 3/8 inch Bearings on Auger Drive
- Category II or III Welded Hitch
- **Hitch Designed for Quick Hitch Only**
- Unibody Design
- Body Reinforcements
- Hitch Stand
- Rear-mounted
- Hardened Steel Cutting Edge
- Adjustable Skid Shoes
- Gear-driven Spout 270 Degrees
- 14 inch Diameter Heavy-duty Spout
- Hydraulic Spout Rotator with Hoses & Couplers
- Adjustable Deflector
- Shear-bolt Protection
- Easy Access Shear-bolts
- Lateral Auger-locking Device
- Well Supported Idler
- Heavy-duty Two-stage Design
- Charcoal Grey Paint

### Specs & Pricing

Model	Width of Cut	Height of Cut	Weight	Auger Dia.	HP Required	List Price
961S	96 inch	40 inch	1500 pounds	1-24 inch	80-120	\$10,629.00
Hydraulic Deflector for Standard Spout (hoses and couplers are included)					8305-30	\$ 350.00
Truck-loading Spout Outright (includes deflector, hoses & couplers)					N36140	\$ 1,680.00


Note: This is a 540 RPM Blower only. For 1000 RPM Blowers See "H" or "I" Series  
Crating (net prices) = \$290.00

L10045 - Printed 3.1.19 - Prices Effective 3.1.19 - Subject to Change - USD - FOB Factory - Uncrated

**800.828.7624 - loftness.com - 320.848.6266**

# LOFTNESS 2019 Retail Prices

## Rear-mounted Snow Blowers for Tractors 100-200 HP

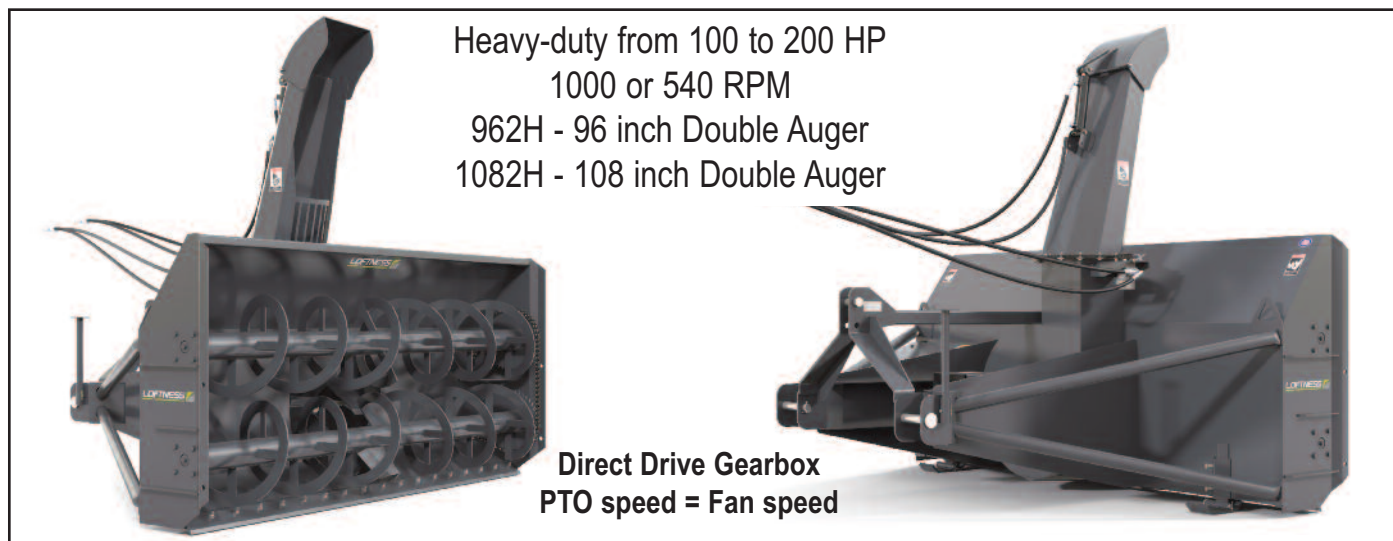

### Features

- Bolt-on Cutting Edge
- 540 or 1000 RPM PTO Shaft (must choose)
- 200 HP Oilbath DIRECT DRIVE Gearbox
- Two 16 inch Dia. Open-spoke Augers
- 30 in. Dia. Fan Housing, 11 in. Deep
- # 80 Roller Chain
- 1-1/2 inch Bearings on Auger & Drive
- Two-stage Design
- Category II or III Welded Hitch
- **Hitch Designed for Quick Hitch Only**
- 48 inch Cutting Height
- Body Reinforcements
- Hitch Stand
- Rear-mounted
- Hardened Steel Cutting Edge
- Adjustable Skid Shoes
- Gear-driven Spout 270 Degrees
- 14 inch Diameter Heavy-duty Spout
- Hydraulic Spout Rotator with Hoses & Couplers
- Adjustable Deflector (Hydraulic Option Shown)
- Shear-bolt Protection
- Easy Access Shear-bolts
- Lateral Auger-locking Device
- Well-supported Idler
- Heavy-duty Construction
- Charcoal Grey Paint

### Specs & Pricing

Model	Width of Cut	Weight	HP Required @ PTO Speed	List Price
962H	96 inch	1900 pounds	100 @ 540 - 150@1000	\$ 12,129.00
1082H	108 inch	1980 pounds	120 @ 540 - 160@1000	\$ 12,359.00


540 RPM PTO Shaft			N30139	\$ 790.00
1-3/8 inch - 1000 RPM PTO Shaft			N30140	\$ 770.00
1-3/4 inch - 1000 RPM PTO Shaft			N30141	\$ 840.00
Hydraulic Deflector for Standard Spout (hoses and couplers are included)			8305-30	\$ 350.00
Truck-loading Spout Outright (includes deflector, hoses & couplers)			N36140	\$ 1,680.00
<b>Crating (net prices) 962 = \$290.00 - 1082 = \$345.00</b>				

L10045 - Printed 3.1.19 - Prices Effective 3.1.19 - Subject to Change - USD - FOB Factory - Uncrated

**800.828.7624 - loftness.com - 320.848.6266**

# LOFTNESS 2019 Retail Prices

## Rear-mounted Snow Blowers for Tractors 140-200 HP

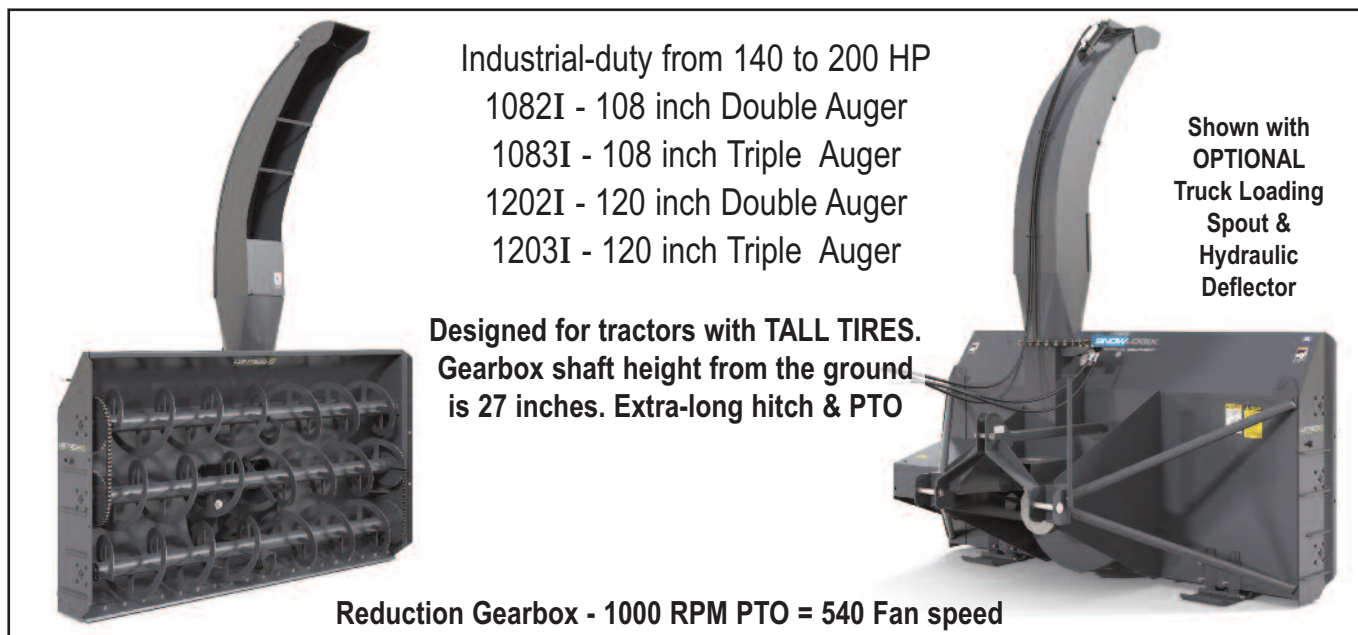

### Features

- 1000 RPM PTO Shaft
- 200 HP Reduction Gearbox
- 16 inch Dia. Open-spoke Augers
- 36 in. Dia. Fan Housing, 12 in. Deep
- # 80 Roller Chain
- 1-1/2 inch Bearings on Auger & Drive
- Two-stage Design
- Category II or III Welded Hitch
- **Hitch Designed for Quick Hitch Only**
- Body Reinforcements
- Hitch Stand
- Bolt-on, Hardened Steel, Cutting Edge
- Adjustable Skid Shoes
- Gear-driven Spout 270 Degrees
- 14 inch Diameter Heavy-duty Spout
- Hydraulic Spout Rotator with Hoses & couplers
- Adjustable Deflector
- Shear-bolt Protection
- Easy-access Shear-bolts
- Lateral Auger-locking Device
- Heavy-duty Construction
- Charcoal Grey Paint

### Specs & Pricing

Model	Width of Cut	Height of Cut	Weight	HP Required	List Price
1082I	108"	48"	2240#	140-200 H.P.	\$13,639.00
1083I	108"	66"	2840#	175-200 H.P.	\$16,049.00
1202I	120"	48"	2460#	150-200 H.P.	\$14,749.00
1203I	120"	66"	3180#	185-200 H.P.	\$17,169.00

1-3/8 inch - 1000 RPM PTO Shaft	N16236	\$ 930.00
1-3/4 inch - 1000 RPM PTO Shaft	N16237	\$ 1,020.00
Hydraulic Deflector for Standard Spout (hoses and couplers are included)	8305-30	\$ 350.00
Truck-loading Spout Outright (includes deflector, hoses & couplers)	N36140	\$ 1,680.00
<b>Crating (net price)</b>	<b>1082 = \$345.00</b>	<b>1083 = \$365.00</b>

L10045 - Printed 3.1.19 - Prices Effective 3.1.19 - Subject to Change - USD - FOB Factory - Uncrated

**800.828.7624 - loftness.com - 320.848.6266**

# LOFTNESS 2019 Retail Prices

## Front-mounted Snow Blowers for Tractors 150-200 HP

Designed for tractors with front three-point hitch  
and front 1000 rpm CCW PTO



Heavy-duty from 150 to 200 HP

962HFR - 96 inch Double Auger  
1082HFR - 108 inch Double Auger

**Special Order  
Only**

### Features

- Front-mounted
- 1000 RPM CCW Front PTO on Tractor
- 200 HP Oilbath Reduction Drive Gearbox
- Two 16 inch Dia. Open-spoke Augers
- 30 in. Dia. Fan Housing, 11 in. Deep
- # 80 Roller Chain
- 1-1/2 inch Bearings on Auger & Drive
- Two-stage Design
- Category II or III Welded Hitch
- Cat II or III with Quick Hitch or Cat III without
- 48 inch Cutting Height
- Body Reinforcements
- Hitch Stand
- Bolt-on Hardened Steel Cutting Edge
- Adjustable Skid Shoes
- Gear-driven Spout 270 Degrees
- 14 inch Diameter Heavy-duty Spout
- Hydraulic Spout Rotator with Hoses & Couplers
- Adjustable Deflector
- Heavy-duty Construction
- Shear-bolt Protection
- Easy-access Shear-bolts
- Lateral Auger-locking Device
- Well-supported Idler
- Charcoal Grey Paint

### Specs & Pricing

Model	Width of Cut	Weight	HP Required	List Price
962HFR	96 inch	2100 pounds	150 to 200	\$ 13,089.00
1082HFR	108 inch	2200 pounds	150 to 200	\$ 13,429.00
1-3/8 inch - 1000 RPM PTO Shaft (Short - 24"-38" yoke to yoke)			N16236	\$ 930.00
1-3/4 inch - 1000 RPM PTO Shaft (Short - 24"-38" yoke to yoke)			N16237	\$ 1,020.00
1-3/8 inch - 1000 RPM PTO Shaft (Long - 35"-60" yoke to yoke)			N30140	\$ 770.00
1-3/4 inch - 1000 RPM PTO Shaft (Long - 35"-60" yoke to yoke)			N30141	\$ 840.00
Hydraulic Deflector for Standard Spout (hoses and couplers are included)			8305-30	\$ 350.00
Truck-loading Spout Outright (includes deflector, hoses & couplers)			N36140	\$ 1,680.00

Crating (net prices) 962 = \$290.00 - 1082 = \$345.00

L10045 - Printed 3.1.19 - Prices Effective 3.1.19 - Subject to Change - USD - FOB Factory - Uncrated

**800.828.7624 - loftness.com - 320.848.6266**

# LOFTNESS 2019 Retail Prices

## Power Pak - Auxillary Hydraulic Unit PTO-driven, Three-point Hitch Mounted for Powering Attachments on a Front-end Loader



### Features

- 540 6b Splined PTO drive
- Three-point Hitch Mounting
- High Pressure Gear Pump
- 20, 25, 33 or 40 G.P.M. Models
- Industrial Planetary Pump Drive
- Universal Drawbar-mounted PTO Pump
- Adjustable Relief Valve up to 3500 PSI
- Overrunning Bypass Protection
- 25 Gallon Reservoir
- 12 V. DC Hydraulic Oil Cooler
- Tank Heater with 110V Cord
- Oil Level Sight Gage
- Oil Temperature Indicator
- In-line, Large Capacity, Oil Filter
- Suction Strainer
- Category I or II Hitch Mount
- With or Without Quick Hitch
- Adjustable Storage Stands
- 37 Degree Fittings
- 20' Hoses - 3/4 inch
- Quick Couplers and Snow Blower Not Included

### Specs & Pricing

Model Number	Output (GPM)	Weight (pounds)	Tractor Requirement	List Price (USD)
HPP20C	20	566	35-65 HP	\$ 7,389.00
HPP25C	25	568	40-80 HP	\$ 7,389.00
HPP33C	33	570	65-150 HP	\$ 7,609.00
HPP40C	40	572	80-165 HP	\$ 7,829.00

Crating (net price) \$120.00

L10045 - Printed 3.1.19 - Prices Effective 3.1.19 - Subject to Change - USD - FOB Factory - Uncrated

800.828.7624 - [loftness.com](http://loftness.com) - 320.848.6266